


WIRE-WAY COVER
 ALLOWS QUICK ACCESS FOR WIRING
 SUPPLY WIRES TO FIXTURE WITHOUT
 REMOVING THE FIXTURES REFLECTOR.

24" OR 48"
 FRONT VIEW
 (PARALLEL TO LAMP)

ADJUSTABLE END BRACKETS SLIDE OVER
 T-BARS FOR INSTALLATION INTO GRID CEILINGS.

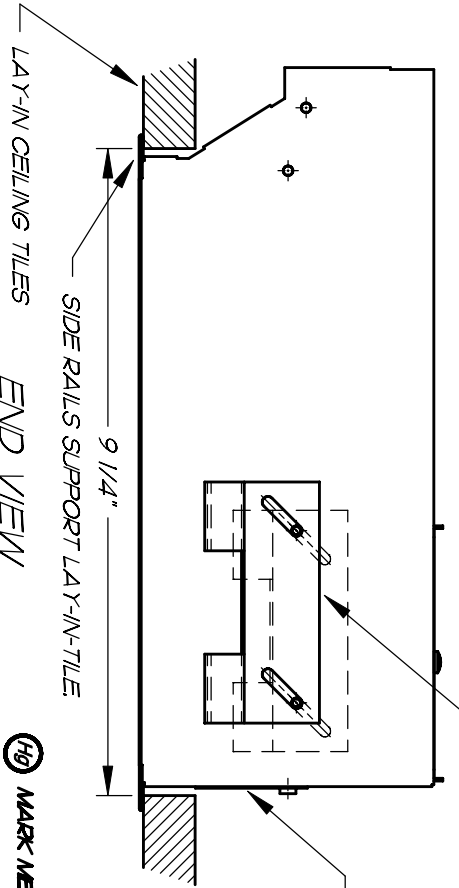

9 1/4"
 END VIEW
 (PERPENDICULAR TO LAMP)

Ⓜ MARK MEANS LAMP CONTAINS MERCURY.

FOLLOW DISPOSAL LAWS
 SEE WWW.LAMERCYCLE.ORG

- INSTALLATION INSTRUCTIONS**
1. FOR BEST PERFORMANCE PLACE FIXTURE 3 FEET FROM LAMP SIDE OF FIXTURE TO WALL.
 2. COMPLETE WIRING TO POWER SUPPLY AND GROUND UTILIZING THE QUICK ACCESS PLATE.
 3. REMOVE PROTECTIVE FILM DUST GUARD FROM REFLECTORS.
- DO NOT REMOVE REFLECTOR TO WIRE FIXTURE. YOU MAY DAMAGE REFLECTORS FROM REFLECTORS.**

THIS DRAWING IS THE PROPERTY OF JUNO LIGHTING GROUP. ANY REPRODUCTION OR DISCLOSURE OF THIS INFORMATION WITHOUT WRITTEN CONSENT OF JUNO LIGHTING GROUP IS PROHIBITED. JUNO LIGHTING GROUP RESERVES THE RIGHT TO CHANGE MATERIALS AND DESIGN WITHOUT NOTICE.

065308

Juno Lighting Group
 12001 Exit Five Pkwy
 Fishers, IN 46037

INSTRUCTION SHEET
 1' X 2' WALLWASH - T-BAR CEILING

PROJECT	SCALE	DATE	DWG. NO.
NONE	NONE	07/29/97	12687
WTS	REV	DATE	
	0		