

IC43N 3 1/4" MR16 Adjustable Housing

IC Rated, Pro-VI™ Telescoping Bar Hangers

Aculux®

AIR-LOC

Features

- Low Voltage IC Rated new construction housing for use in direct contact with insulation
- Sealed Air Loc® housing eliminates air flow and reduces sound transmission through plenum
- Patent Pending, Tru-Line™ platform allows +/-1/2" aperture translation after installation prior to finished ceiling, aiding fixture-to-fixture alignment
- Acu-Aim™ optics employs precision gearing to achieve 370° rotation, 45° tilt hot aiming with a screwdriver • Optimized center lamp beam optics translates lamp forward as it is aimed off nadir
- Choose from 120V High efficiency (>90%) dual tap potted magnetic or 120V High efficiency (>94%), high power factor electronic transformer
- Patent pending, Pro-VI™ telescoping bar hanger system has locking set screws • The captive bugle-headed ring shank nail allows for a quick one-step installation in joist construction while the robust bar eliminates flexing regardless of fixture position
 - For suspended ceilings, use integral t-notches with locking tabs
- Lampholder accepts up to (3) 2" beam control lenses and/or color correction/UV filters • Fixture is supplied with stippled clear uniformity lens
- 50W MR16 Maximum Lamp Rating



new

Description

Precision recessed adjustable MR16 luminaire for accent, task or wall wash lighting. Fixture has 50° visual cutoff to lamp and lamp image. Sealed Air-Loc housing eliminates leak-paths to ensure maximum energy savings and controls plenum sound transmission. IC rated housing for use in direct contact with insulation.

- Listings** UL and cUL listed for direct contact with insulation, through-branch wiring, damp locations
- Wet location listed with approved trims
 - Meets energy code Air Leakage requirements per ASTM E283
 - Product thermally protected
 - Union made.

Ordering Information

Catalog Number: IC43N, 120V Magnetic, High efficiency dual tap toroidal transformer

Catalog Number: IC43N-E1, 120V Electronic, High efficiency, high power factor transformer

Accessories

Catalog Number/Description


T741	Medium Pink Color Filter
T742	Warm Red Color Filter
T743	Daylight Blue Color Filter
T744	Medium Blue Color Filter
T745	Medium Amber Color Filter
T746	Medium Green Color Filter
T7401	Red Dichroic Lens
T7403	Medium Green Dichroic Lens
T7404	Medium Blue Dichroic Lens
T7405	Yellow Dichroic Lens
T7406	Magenta Dichroic Lens

Catalog Number/Description


T7411	Blue Green (Cyan) Dichroic Lens
T7416	Daylight Blue Correction Lens
T7420	Diffuse Spread Lens
T7422	UV Filter Lens
T7477	Prismatic Lens
T7478	Linear Spread Lens
T7459BL	Hexcell Louver
FMA4	Flush Mount Adapter for Flush Mount Trim Installations
CTA4N-125	1 1/4" Thick Ceiling Adapter
CTA4N-163	1 5/8" Thick Ceiling Adapter
CTA4N-200	2" Thick Ceiling Adapter

To order, specify catalog number.

Dimensions

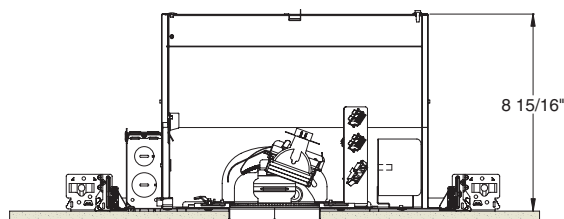

4 1/4" Ceiling Cutout
(4 3/8" for Flush Mount Trims)

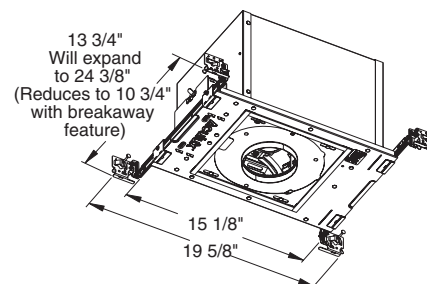

JUNO LIGHTING GROUP
by Schneider Electric

Rev - 7/10
www.junolightinggroup.com

171D

Precision Recessed