

## Description

Precision recessed adjustable MR16 luminaire for accent, task or wall wash lighting. Fixture has 50° visual cutoff to lamp and lamp image. Low profile non-IC housing is for use in non-insulated areas, or where insulation is spaced at least 3" from housing. Supplied with vertically adjustable mounting brackets that accept 1/2" conduit, "C" channel bar hangers, linear bar hangers or telescoping Real Nail bar hangers.

**Listings** UL and cUL listed for through-branch wiring, damp locations and wet locations listed with approved trims • Product thermally protected against improper use of insulation • Union made.

## Features

- Low Voltage, Non-IC Rated new construction housing for use where insulation is spaced 3" away from fixture
- Patent Pending, Tru-Line™ platform allows +/- 1/2" aperture translation after installation prior to finished ceiling, aiding fixture-to-fixture alignment.
- Acu-Aim™ optics employs precision gearing to achieve 370° rotation, 45° tilt hot aiming with a screwdriver • Optimized center lamp beam optics translates lamp forward as it is aimed off nadir
- Fixture is available with four premium transformer options – Magnetic: 120V or 277V High efficiency (>90%) dual tap, potted magnetic, toroidal transformer • Electronic: 120V or 277V High efficiency (>94%), high power factor electronic transformer
- Supplied with vertically adjustable mounting brackets that accept 1/2" conduit, "C" channel hangers (HB-26 or HB-50), linear bar hangers (LB-27) or telescoping Juno Real Nail bar hangers (HB-1)
- Lampholder accepts up to (3) 2" beam control lenses and/or color correction/UV filters • Fixture is supplied with stippled clear uniformity lens.
- 75W MR16 Maximum Lamp Rating.

## Ordering Information

Catalog Number: **TC943N**, 120V Magnetic, High efficiency, dual tap toroidal transformer  
 Catalog Number: **TC943N-V**, 277V Magnetic, High efficiency, dual tap toroidal transformer  
 Catalog Number: **TC943N-E1**, 120V Electronic, High efficiency, high power factor transformer  
 Catalog Number: **TC943N-E2**, 277V Electronic, High efficiency, high power factor transformer

## Accessories

### Catalog Number/Description



<b>T741</b>	Medium Pink Color Filter
<b>T742</b>	Warm Red Color Filter
<b>T743</b>	Daylight Blue Color Filter
<b>T744</b>	Medium Blue Color Filter
<b>T745</b>	Medium Amber Color Filter
<b>T746</b>	Medium Green Color Filter
<b>T7401</b>	Red Dichroic Lens
<b>T7403</b>	Medium Green Dichroic Lens
<b>T7404</b>	Medium Blue Dichroic Lens
<b>T7405</b>	Yellow Dichroic Lens
<b>T7406</b>	Magenta Dichroic Lens
<b>T7411</b>	Blue Green (Cyan) Dichroic Lens
<b>T7416</b>	Daylight Blue Correction Lens

### Catalog Number/Description

<b>T7420</b>	Diffuse Spread Lens
<b>T7422</b>	UV Filter Lens
<b>T7477</b>	Prismatic Lens
<b>T7478</b>	Linear Spread Lens
<b>T7459BL</b>	Hexcell Louver
<b>FMA4</b>	Flush Mount Adapter for Flush Mount Trim Installations
<b>CTA4N-125</b>	1 1/4" Thick Ceiling Adapter
<b>CTA4N-163</b>	1 5/8" Thick Ceiling Adapter
<b>CTA4N-200</b>	2" Thick Ceiling Adapter
<b>HB-1</b>	(2) Real Nail 3 Bar Hangers
<b>HB-26</b>	(2) 26" C-Channel Bar Hangers
<b>HB-50</b>	(2) 50" C-Channel Bar Hangers
<b>LB-27</b>	(2) 27" Linear Bar Hangers

To order, specify catalog number.

## Dimensions

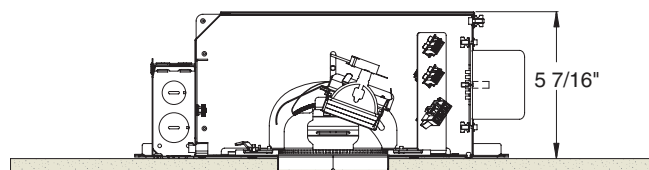

**4 1/4" Ceiling Cutout**  
**(4 3/8" for Flush Mount Trims)**

Precision Recessed