

1' x 2' T-5 Fluorescent Horizontal 2-Lamp Wall Wash - Designer Series



Description

Specialized kicker reflector provides very wide, striation-free wall wash distribution.

Features

Reflector Non-iridescent specular clear aluminum
 • Protective film dust guard

Electrical Ballast: universal voltage, electronic solid state, class 'P', HPF • Lamp holder: miniature bi-pin T-5 base, white hi-strength thermoplastic

Mechanical Housing and end-plates are heavy gauge die-formed cold rolled steel for strength and rigidity
 • Housing finish is baked white enamel

Mounting T-Bar: End brackets rest on T-bar. Side rails support lay-in tile. Bracket is set for standard 1 1/2" T-bar. Drywall: Drywall frame mounts in ceiling; framed by others. Fixture lies in drywall frame



Lamp Shown with two (2) 24-watt T-5 fluorescent lamp (by others) • One-lamp version is available; see options

Labels and Listings UL/C-UL Listed for feed through and damp locations • I.B.E.W. Union made

Ordering Information Example: 25R91-24E-SA-1L

Model	Lamp Wattage	Ballast	Trim Options	Options
25R91	24	E	SA	1L
25R91	24	E-Electronic Universal Voltage	Alzak® Clear Finish Options SA-Clear CG-Champagne Gold BA-Black PA-Pewter WT-Wheat BR-Bronze	1L-Single Lamp DB-Dimming Ballast (Consult Factory) ***F-Fuse and Fuse Holder (Where *** = voltage) CP-Chicago Plenum Approval (Consult factory for availability)

Dimensions

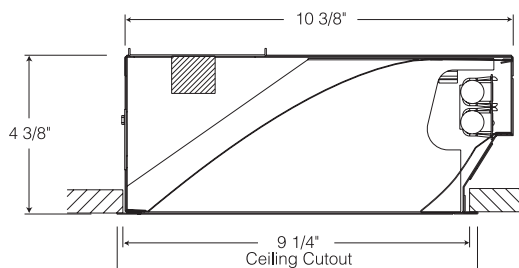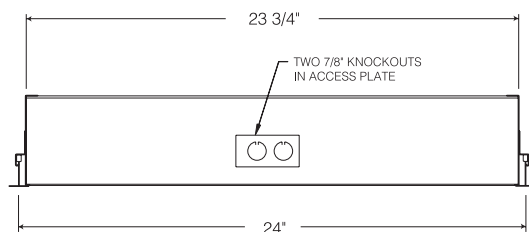

¹ Add a -1 for 120V, a -2 for 277V

[†] Consult Factory for Availability

